Benq

RE6504

Essential Series











The EDLA-certified RE04 seamlessly integrates Google services with BenQ's reliable hardware and software.
Easily access your favourite education apps through the Google Play Store, as well as Google and Microsoft apps and tools to enhance your lessons.



Safeguard your data through the RE04's secure login options and access controls, regular system updates, and built-in **Google Play Protect** and Safe Browsing measures.



Eye care technologies, including the RE04's low blue light filter and flicker-free screen, help reduce eye strain in class, while its antiglare 4K screen ensures clear images every time.

Panel	Screen size	65"
	Resolution	4K UHD 3840 x 2160
	Brightness (typ.) w/ glass	400 nits
	Contrast ratio (typ.)	1200:1
	Dynamic contrast ratio	30,000:1
	Viewing angle (H/V)	178°
	Response time (G-t-G)	8 ms
	Backlight life (hrs)	50,000
	Panel surface	AG, Haze 25%
	Operating hours	18 / 7
	Orientation	Landscape
Platform solution	System memory	8GB
	Storage	32GB
	os	Android 13.0
	GMS integration	Yes
Power	Power supply	100V~240V, 50-60Hz
	Typical power consumption (W/h)	66.7
	AC power switch	Yes
	Wake up	LAN / HDMI / VGA
Touch	Technology	Precision IR
	Number of touch points	Up to 40
	Interface	USB Type B x 2
Glass	Tempered glass	3.2 mm
	Hardness	9Н
	AG coating	Yes
ClassroomCare® Technology	Eye care solution: flicker-free & low blue light (TÜV-certified)	Yes
	Air quality sensors & air ioniser	No
	Germ-resistant screen	No
Environment	Germ-resistant screen Operating temperature	No 0°C ~ 40°C
Environment		110
Environment	Operating temperature	0°C ~ 40°C
Environment Connectivity	Operating temperature Operating humidity	0°C ~ 40°C 20% ~ 80% RH non-condensing
	Operating temperature Operating humidity Energy efficiency	O°C - 40°C 20% - 80% RH non-condensing ENERGY STAR* 8.0-certified VGA x I, HDMI 2.0 x 3, DisplayPort 1.2a x I,
	Operating temperature Operating humidity Energy efficiency Input Output USB	0°C - 40°C 20% - 80% RH non-condensing ENERGY STAR* 8.0-certified VGA x1, HDMI 2.0 x 3, DisplayPort 1.2a x1, Mic-in (3.5 mm) x1, PC Audio (3.5 mm) x1 HDMI 2.0 x1, Earphone-audio (3.5 mm) x1, SPDIF (Optical) x1 Type A x4 (2.0 x2 / 3.0 x2), Type B x2 (2.0), Type C x2 (2.0 x1 / 3.0 (PD 65 W) x1)
	Operating temperature Operating humidity Energy efficiency Input Output	0°C - 40°C 20% - 80% RH non-condensing ENERGY STAR* 8.0-certified VGA x 1, HDMI 2.0 x 3, DisplayPort 1.2a x 1, Mic-in (3.5 mm) x 1, PC Audio (3.5 mm) x 1 HDMI 2.0 x 1, Earphone-audio (3.5 mm) x 1, SPDIF (Optical) x 1
	Operating temperature Operating humidity Energy efficiency Input Output USB Wi-Fi 6 & Bluetooth 5.2 RS232	0°C - 40°C 20% - 80% RH non-condensing ENERGY STAR* 8.0-certified VGA x1, HDMI 2.0 x 3, DisplayPort 1.2a x1, Mic-in (3.5 mm) x1, PC Audio (3.5 mm) x1 HDMI 2.0 x1, Earphone-audio (3.5 mm) x1, SPDIF (Optical) x1 Type A x4 (20 x2 / 3.0 x2), Type B x2 (2.0), Type C x2 (2.0 x1 / 3.0 (PD 65 W) x1) Optional (WD02AT)
	Operating temperature Operating humidity Energy efficiency Input Output USB Wi-Fi 6 & Bluetooth 5.2 RS232 RJ45 (LAN)	0°C - 40°C 20% - 80% RH non-condensing ENERGY STAR* 8.0-certified VGA x1, HDMI 2.0 x 3, DisplayPort 1.2a x1, Mic-in (3.5 mm) x1, PC Audio (3.5 mm) x1 HDMI 2.0 x1, Earphone-audio (3.5 mm) x1, SPDIF (Optical) x1 Type A x4 (2.0 x2 / 3.0 x2), Type B x2 (2.0), Type C x2 (2.0 x1 / 3.0 (PD 65 W) x1) Optional (WD02AT) x1 x2 (Android / OPS) up to 1000Mbps
Connectivity	Operating temperature Operating humidity Energy efficiency Input Output USB Wi-Fi 6 & Bluetooth 5.2 R\$232 RJ45 (LAN) Remote controller	0°C - 40°C 20% - 80% RH non-condensing ENERGY STAR* 8.0-certified VGA x I, HDMI 2.0 x 3, DisplayPort 1.2a x I, Mic-in (3.5 mm) x I, PC Audio (3.5 mm) x I HDMI 2.0 x I, Earphone-audio (3.5 mm) x I, SPDIF (Optical) x I Type A x 4 (2.0 x 2 / 3.0 x 2), Type B x 2 (2.0), Type C x 2 (2.0 x 1 / 3.0 (PD 65 W) x I) Optional (WD02AT) x1 x2 (Android / OPS) up to 1000Mbps x1
	Operating temperature Operating humidity Energy efficiency Input Output USB Wi-Fi 6 & Bluetooth 5.2 RS232 RJ45 (LAN) Remote controller Built-in speaker	0°C - 40°C 20% - 80% RH non-condensing ENERGY STAR* 8.0-certified VGA x I, HDMI 2.0 x 3, DisplayPort 1.2a x 1, Mic-in (3.5 mm) x 1, PC Audio (3.5 mm) x 1 HDMI 2.0 x I, Earphone-audio (3.5 mm) x 1, SPDIF (Optical) x 1 Type A x 4 (2.0 x 2 / 3.0 x 2), Type B x 2 (2.0), Type C x 2 (2.0 x 1 / 3.0 (PD 65 W) x 1) Optional (WD02AT) x 1 x 2 (Android / OPS) up to 1000Mbps x 1 20W x 2
Connectivity	Operating temperature Operating humidity Energy efficiency Input Output USB Wi-Fi 6 & Bluetooth 5.2 RS232 RJ45 (LAN) Remote controller Built-in speaker Array microphones	0°C - 40°C 20% - 80% RH non-condensing ENERGY STAR* 8.0-certified VGA x I, HDMI 2.0 x 3, DisplayPort 1.2a x 1, Mic-in (3.5 mm) x 1, PC Audio (3.5 mm) x 1 HDMI 2.0 x I, Earphone-audio (3.5 mm) x 1, SPDIF (Optical) x 1 Type A x 4 (2.0 x 2 / 3.0 x 2), Type B x 2 (2.0), Type C x 2 (2.0 x 1 / 3.0 (PD 65 W) x 1) Optional (WD02AT) x1 x2 (Android / OPS) up to 1000Mbps x1 20W x 2 No
Connectivity	Operating temperature Operating humidity Energy efficiency Input Output USB Wi-Fi 6 & Bluetooth 5.2 RS232 RJ45 (LAN) Remote controller Built-in speaker Array microphones Screen dimension (mm)	0°C - 40°C 20% - 80% RH non-condensing ENERGY STAR* 8.0-certified VGA x I, HDMI 2.0 x 3, DisplayPort 1.2a x 1, Mic-in (3.5 mm) x 1, PC Audio (3.5 mm) x 1 HDMI 2.0 x I, Earphone-audio (3.5 mm) x 1, SPDIF (Optical) x 1 Type A x 4 (2.0 x 2 / 3.0 x 2), Type B x 2 (2.0), Type C x 2 (2.0 x 1 / 3.0 (PD 65 W) x 1) Optional (WD02AT) x 1 x 2 (Android / OPS) up to 1000Mbps x 1 20W x 2 No 1482.1 x 907 x 87.7
Connectivity	Operating temperature Operating humidity Energy efficiency Input Output USB Wi-Fi 6 & Bluetooth 5.2 RS232 RJ45 (LAN) Remote controller Built-in speaker Array microphones Screen dimension (mm) Net / Gross weight (kg)	0°C - 40°C 20% - 80% RH non-condensing ENERGY STAR* 8.0-certified VGA x I, HDMI 2.0 x 3, DisplayPort 1.2a x 1, Mic-in (3.5 mm) x 1, PC Audio (3.5 mm) x 1 HDMI 2.0 x I, Earphone-audio (3.5 mm) x 1, SPDIF (Optical) x 1 Type A x 4 (2.0 x 2 / 3.0 x 2), Type B x 2 (2.0), Type C x 2 (2.0 x 1 / 3.0 (PD 65 W) x 1) Optional (WD02AT) x 1 x 2 (Android / OPS) up to 1000Mbps x 1 20W x 2 No 1482.1 x 907 x 87.7 36.4 / 49.4
Connectivity	Operating temperature Operating humidity Energy efficiency Input Output USB Wi-Fi 6 & Bluetooth 5.2 RS232 RJ45 (LAN) Remote controller Built-in speaker Array microphones Screen dimension (mm)	0°C - 40°C 20% - 80% RH non-condensing ENERGY STAR* 8.0-certified VGA x I, HDMI 2.0 x 3, DisplayPort 1.2a x I, Mic-in (3.5 mm) x I, PC Audio (3.5 mm) x 1 HDMI 2.0 x I, Earphone-audio (3.5 mm) x 1, SPDIF (Optical) x 1 Type A x 4 (2.0 x 2 / 3.0 x 2), Type B x 2 (2.0), Type C x 2 (2.0 x I / 3.0 (PD 65 W) x I) Optional (WD02AT) x 1 x 2 (Android / OPS) up to 1000Mbps x 1 20W x 2 No 1482.1 x 907 x 87.7 36.4 / 49.4 29.9 48.3 14 14
Connectivity	Operating temperature Operating humidity Energy efficiency Input Output USB Wi-Fi 6 & Bluetooth 5.2 RS232 RJ45 (LAN) Remote controller Built-in speaker Array microphones Screen dimension (mm) Net / Gross weight (kg)	0°C - 40°C 20% - 80% RH non-condensing ENERGY STAR* 8.0-certified VGA x I, HDMI 2.0 x 3, DisplayPort 1.2a x I, Mic-in (3.5 mm) x I, PC Audio (3.5 mm) x 1 HDMI 2.0 x I, Earphone-audio (3.5 mm) x 1, SPDIF (Optical) x 1 Type A x 4 (2.0 x 2 / 3.0 x 2), Type B x 2 (2.0), Type C x 2 (2.0 x I / 3.0 (PD 65 W) x I) Optional (WD02AT) x 1 x 2 (Android / OPS) up to 1000Mbps x 1 20W x 2 No 1482.1 x 907 x 87.7 36.4 / 49.4
Connectivity	Operating temperature Operating humidity Energy efficiency Input Output USB Wi-Fi 6 & Bluetooth 5.2 RS232 RJ45 (LAN) Remote controller Built-in speaker Array microphones Screen dimension (mm) Net / Gross weight (kg) Bezel width (mm) Wall mounting (VESA)	0°C - 40°C 20% - 80% RH non-condensing ENERGY STAR* 8.0-certified VGA x I, HDMI 2.0 x 3, DisplayPort 1.2a x I, Mic-in (3.5 mm) x I, PC Audio (3.5 mm) x I HDMI 2.0 x I, Earphone-audio (3.5 mm) x I, SPDIF (Optical) x I Type A x 4 (2.0 x 2 / 3.0 x 2), Type B x 2 (2.0), Type C x 2 (2.0 x I / 3.0 (PD 65 W) x I) Optional (WD02AT) x I x 2 (Android / OPS) up to 1000Mbps x I 20W x 2 No 1482.1 x 907 x 87.7 36.4 / 49.4 29.9 48.3 14 14 VESA 600 x 400 mm (4 x M8 x 25L),
Connectivity	Operating temperature Operating humidity Energy efficiency Input Output USB Wi-Fi 6 & Bluetooth 5.2 RS232 RJ45 (LAN) Remote controller Built-in speaker Array microphones Screen dimension (mm) Net / Gross weight (kg) Bezel width (mm) Wall mounting (VESA) (screw type / max.length)	0°C - 40°C 20% - 80% RH non-condensing ENERGY STAR* 8.0-certified VGA x1, HDMI 2.0 x 3, DisplayPort 1.2a x1, Mic-in (3.5 mm) x1, PC Audio (3.5 mm) x1 HDMI 2.0 x1, 8 arphone-audio (3.5 mm) x1, SPDIF (Optical) x1 Type A x 4 (2.0 x2 / 3.0 x2), Type B x 2 (2.0), Type C x 2 (2.0 x1 / 3.0 (PD 65 W) x1) Optional (WD02AT) x1 x2 (Android / OPS) up to 1000Mbps x1 20W x 2 No 1482.1 x 907 x 87.7 36.4 / 49.4 29.9 48.3 14 14 VESA 600 x 400 mm (4 x M8 x 25L), wall mount kit included



Save lessons in editable whiteboard files (IWB) with Cloud Whiteboarding. Google Classroom is integrated with EZWrite WEB.



InstaShare 2

Wireless screen sharing & casting from any device. Share several screens simultaneously, with different types of content.



X-Sign Broadcast

Announcement system with cross-campus communication. Send visual alerts, warnings, and videos to all or one specific device.



Account Management System to conveniently load and access your account and cloud storage from any BenQ display.



Device Management Solution centrally oversees all displays to get real-time status information, deploy OTA updates & more.

INPUT AND OUTPUT TERMINALS















TYPE- C 3.0

SENSOR & KEYPAD BUTTONS











SIDE I/O













USB-C 2.0





SD CARD SLOT

600000

DOWN I/O



RS232



SPDIF



LAN-OUT



LAN-IN



PC AUDIO-IN




VGA

SECURED WIFI DONGLE INPUT PORT




USB 2.0

DIMENSIONS (MM)

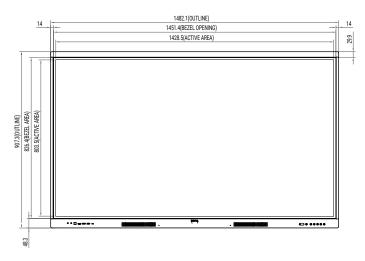



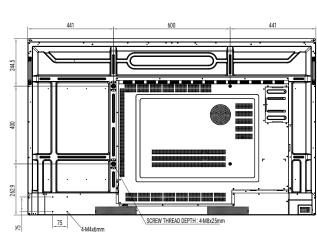

Benq

© 2024 BenQ Corp. Specifications may vary by region, please visit your local stores for details. Actual product's features and specifications are subject to change without notice. This material may include corporate names, trademarks and logos of third parties which are the properties of the third parties respectively.



www.benq.eu/en-uk/education.html